

00299-9WH: with 9X3W White high power LED.  
 00299-9BU : with 9X3W BU high power LED.  
 00299-9GN : with 9X3W Green high power LED.

207610  
207611

**SPECIFICATION**




SSA-point lighting equipment AS  
 maineworld  
 Stat-Ene-Vej 68, Tietgenbyen  
 DK-5220 Odense SØ - Denmark  
 Tel. +45 6612 5500  
 Fax: +45 6612 5548

Housing description: Made of SS316  
 Operating voltage: DC 10-30 Volts

**INSTALLATION INSTRUCTION**

1. This light is designed with water cooling system, DO NOT obstruct the water cooling passages behind the light. MUST BE installed under waterline and used only when SUBMERGED.
2. For 3 mounting holes, drill 9/64" diam. x 1/2" deep & countersink 1/4", fill up the countersinks with sealant
3. For wire passage hole, drill 1/2" diam. x 1/4" deep, in the center of this hole drill 1/4" hole through the transom.
4. In the back of the light, overfill the cup around the wire with sealant and slide the wire through the transom. Do not put sealant outside of the cup.
5. Place the light over the holes and push slowly to allow the sealant to fill the center hole in the transom, then tight the 3 screws.
6. *Illumination increased by 2 times with a secondary optical lens used!*

**WIRING DIAGRAM for**  
 00299-9GN/00299-9BU/00299-9WH

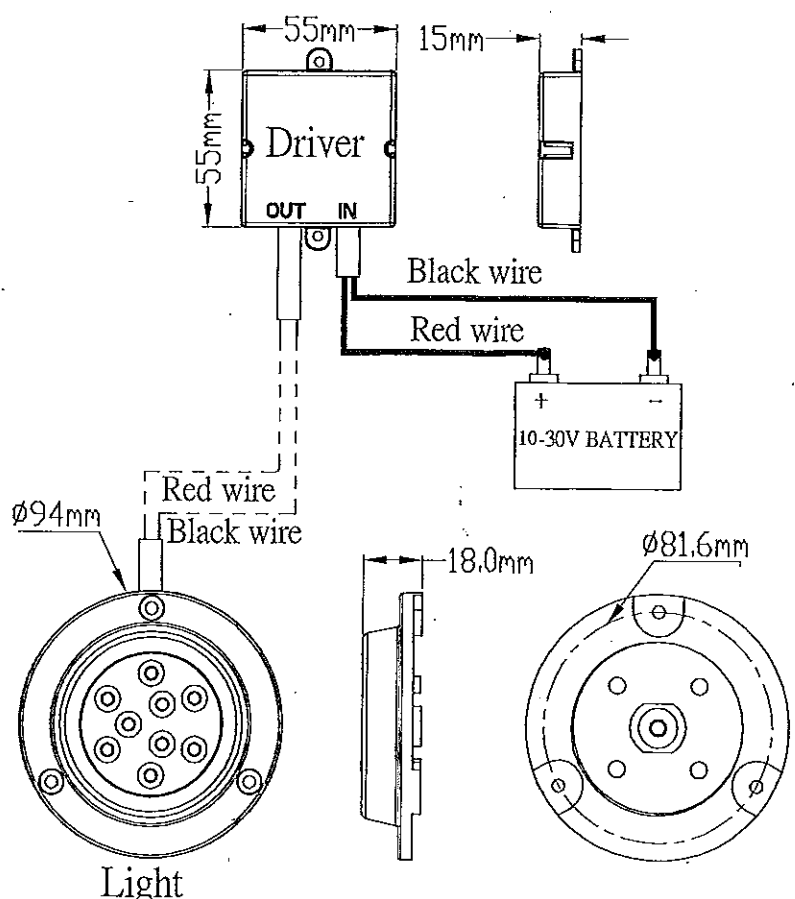

CE