


|              |  |                 |                      |
|--------------|--|-----------------|----------------------|
| <b>Car</b>   | Audi RSQ3 F3                             | <b>Part No.</b> | SAUS112              |
| <b>Year</b>  | 2019-Current                             | <b>Fit Kits</b> | 416FK                |
| <b>Notes</b> | Where not supplied use original fittings | <b>Features</b> | Pipe Diameter:- 80mm |

Estimated Fitting Time: 1 Hour 30 Minutes

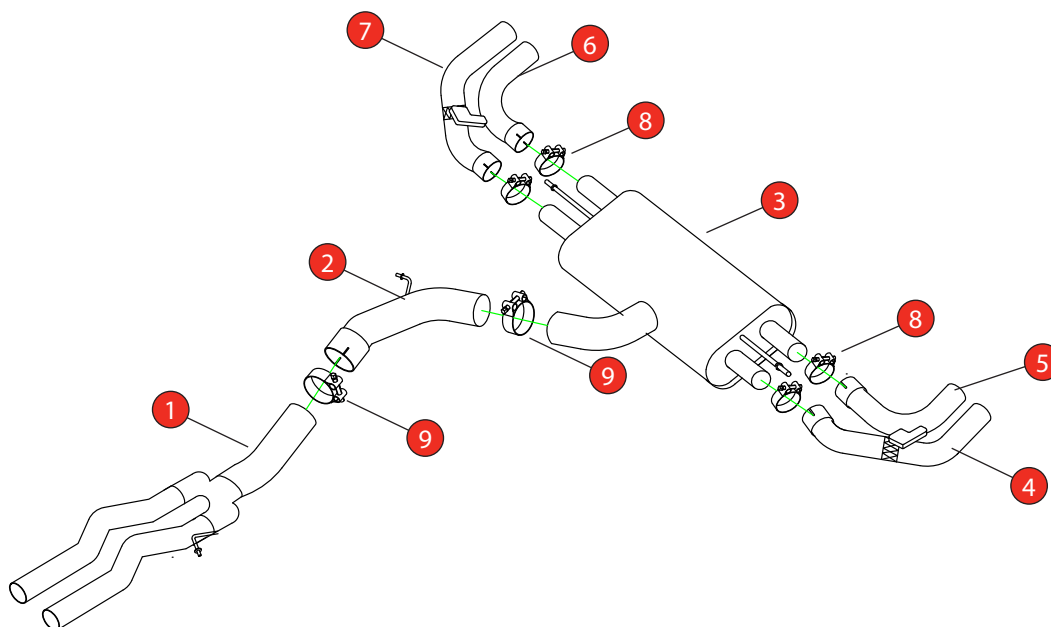

| NO.            | PART NO.   | DESCRIPTION                           | QTY |
|----------------|------------|---------------------------------------|-----|
| 1              | 886AU      | Non-resonated Centre Section          | 1   |
| 2              | 887AU      | Link Pipe                             | 1   |
| 3              | 888AU      | Rear Silencer                         | 1   |
| 4              | 890AU      | L/H Valved Outer Trim Connecting Pipe | 1   |
| 5              | 891AU      | L/H Inner Trim Connecting Pipe        | 1   |
| 6              | 892AU      | R/H Inner Trim Connecting Pipe        | 1   |
| 7              | 894AU      | R/H Valved Outer Trim Connecting Pipe | 1   |
| <b>Fit Kit</b> |            |                                       |     |
| 8              | Z016.10070 | 66 H/D Clamp                          | 4   |
| 9              | Z016.10069 | 79-85mm Clamp                         | 2   |

|            |            |
|------------|------------|
| DATE       | 20/06/2023 |
| ISSUE      | 00         |
| AUTHORISED | S Shipley  |

**NOTE:** ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.



STAY CONNECTED TO RED POWER.

|              |  |                 |                      |
|--------------|--|-----------------|----------------------|
| <b>Car</b>   | Audi RSQ3 F3                             | <b>Part No.</b> | SAUS112              |
| <b>Year</b>  | 2019-Current                             | <b>Fit Kits</b> | 416FK                |
| <b>Notes</b> | Where not supplied use original fittings | <b>Features</b> | Pipe Diameter:- 80mm |

Estimated Fitting Time: 1 Hour 30 Minutes



A) Remove the electronic actuator from the original exhaust.

B) On the Scorpion product fit the fixing bow into the valve and use the actuator to secure the bow in place.

C) Use the M6 bolts and washers to fasten the actuator to the valve ensuring the two straights on the fixing bow fit between the grooves on both of the posts.

